


# LARSEN'S HYPER CONNECT™ SYSTEM

Larsen is proud to present the HyPer Connect™ System . . . a breakthrough in radio connectors. HyPer Connect™ is a universal master connector system for all major radio brands.

## Key Features


- Factory pre-installed for greater reliability
- Wide variety of HyPer Connect™ adaptors
- Small body for easy cable runs
- Matching connectors thread on in seconds
- Minimal loss, just 0.1 dB
- Reduce cable kit and connector inventory
- Frees valuable technician time

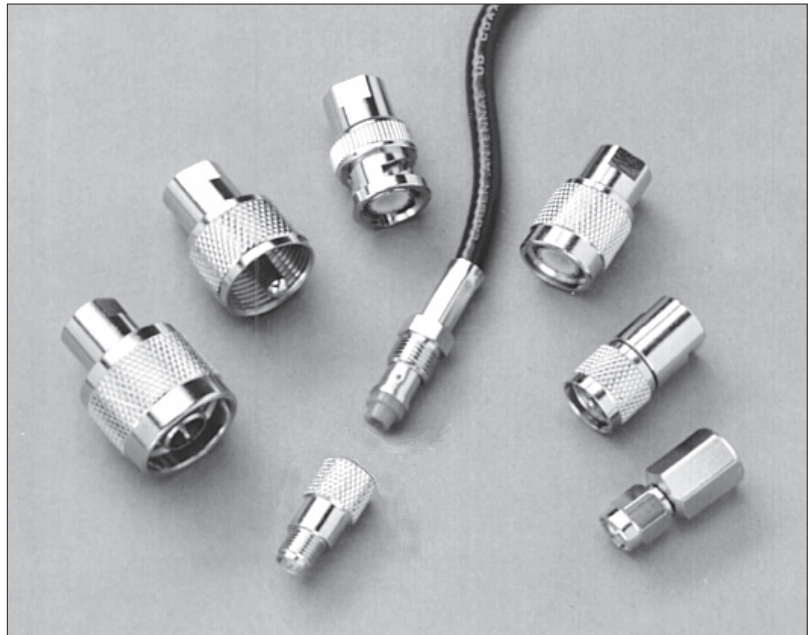

Left to right: N, PL, BNC, TNC, Mini-UHF, SMA male.  
Center: SMA Female

## General Description

Larsen's HyPer Connect™ System (high performance universal connector system) removes the burden of installing and stocking a wide variety of connector types by pre-installing a universal connector on the coax and providing a wide variety of adaptor connectors. The adaptors thread on the universal connector in seconds. And the combined loss is nearly invisible to the radio, just 0.1 dB.

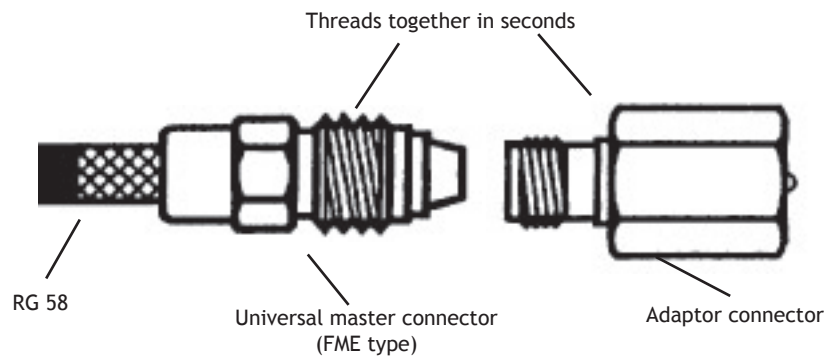

# LARSEN'S HYPER CONNECT™ SYSTEM

## Big Net Savings

When the factory pre-installs the HyPer Connect™ and the installer works with the universal adaptors, there are big advantages:

1. Installers no longer have the time-consuming installation chore, freeing them for more pressing work.
2. Although many installers are excellent with connector installations, many don't do enough of all types to stay 100% competent.
3. Antenna troubleshooting takes lots of time. And that means down time for the radio. Most trouble comes down to poorly installed connectors.
4. The wide range of radio equipment with equally big numbers of connector types make it hard to stock and service.

Reduced installer time, fewer connector failures, faster service response and lower inventory investment means big net savings to the user, dealer or fleet operator.

## FME SPECIFICATIONS

FREQUENCY	0 MHz - 1.8 GHz	IMPEDANCE	50Ω
VSWR	1.3:1 Max	VOLTAGE	500 V Peak
	INSULATION RESISTANCE		500 mΩ minimum

## How to Order

MODEL	DESCRIPTION
-------	-------------

### Connectors

FME Crimp	HyPer master connector, crimp style
FSF	SMA female adaptor
FSM	SMA male adaptor
FN	N adaptor
FM	Mini-UHF adaptor (MPL)
FB	BNC adaptor
FT	TNC adaptor
FP	PL-259 adaptor

### Cable Kits

NMOKFME	NMO mount, 3/4", 17' RG-58A/U, HyPer installed
NMOKUDFME	NMO mount, 3/4", 17' RG-58/U, Dual Shield, Low Loss, HyPer installed
NMOKHFCXFME	NMO high frequency mount, 3/4", 17' RG-58A/U, HyPer installed
NMOKHFDSEFME	NMO high frequency mount, 3/4", 17' RG-58A/U, Dual Shield, HyPer installed
NMOKHFUDFME	NMO high frequency mount, 3/4", 17' RG-58/U, Dual Shield, HyPer installed

### Magnetic Mounts

NMOMMRFME	NMO mag mount, 3/4", 3 1/2" round, 12' RG-58A/U, HyPer installed
NMOMMRDSFME	NMO mag mount, 3/4", 3 1/2" round, 12' RG-58A/U, Dual Shield, HyPer installed

Others available upon request.