

MULTI BAND VHF/UHF

Larsen offers a variety of mobile antennas for both commercial and amateur dual band applications. Each antenna is specifically designed to provide excellent performance for simultaneous use of VHF and UHF frequencies. One antenna conveniently serves both bands whether using a dual band radio or two separate radios.

Larsen dual band antennas are available in the following styles:


KG: Patented low-impedance glass mount antenna

NMO: Premium Motorola-style 3/4" hole mount

Larsen's dual band line offers these superior performance advantages:

- Handles up to 200 Watts of power on select models
- VSWR at 2:1 or less (except KG)
- Heavy-duty base coils are air wound for lowest RF loss
- Tough 17-7 stainless steel whips for maximum radiation efficiency
- Optional shock spring internally shorted with highly flexible insulated wire to eliminate distortion
- Durable MakroBlend[®] shells are UV and chemical resistant

MULTI BAND VHF/UHF

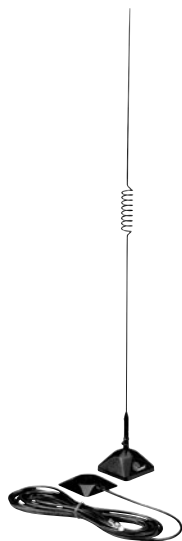

Complete Kulglass glass mount factory tuned dual band antenna for 2m/70cm amateur radio frequencies.

MODEL	FREQUENCY (MHz)	CONN
KG2/70CXPL	144 - 148 / 442 - 448	PL-259
KG2/70CXFME	144 - 148 / 442 - 448	FME

SPECIFICATIONS

GAIN	VHF: 2.14 dBi UHF: 2 dBd / 4.2 dBi
TYPE	1/2 wave/collinear
VSWR (see bandwidth)	2.5:1
POWER RATING	100 Watts
COLOR	Black
WHIP	WKG2/70, .100 open coil
COAX	14' RG-58A/U
MAX HEIGHT	32 3/4"



Dual band coil only for 2m/70cm amateur radio frequencies.

MODEL	FREQUENCY (MHz)
NMO2/70BCO	144 - 148 / 440 - 450

SPECIFICATIONS

TYPE	Dual band coil
COIL	VHF: 146 MHz UHF: 445 MHz
POWER RATING	100 Watts
COLOR	Black
WHIP	Order separately
COAX	Order separately
MAX HEIGHT	3"



Dual band coil and factory tuned black whip for 2m/70cm amateur radio frequencies.

MODEL	FREQUENCY (MHz)
NMO2/70B	144 - 148 / 440 - 450

SPECIFICATIONS

GAIN	VHF: 3.8 dBi UHF: 5.2 dBi
TYPE	VHF: center loaded 1/2 wave UHF: collinear
VSWR (see bandwidth)	2:1
BANDWIDTH @ 1.5	VHF: 2% / UHF: 3%
BANDWIDTH @ 2.0	VHF: 4% / UHF: 6%
COIL	VHF: 146 / UHF: 445 MHz
POWER RATING	100 Watts
WHIP	W2/70B, .100 enc. coil
COAX	Order separately
MAX HEIGHT	34 3/4"

MULTI BAND VHF/UHF

MODEL	FREQUENCY (MHz)	CONN
NMO2/70BK	144 - 148 / 440 - 450	PL-259

SPECIFICATIONS

GAIN	VHF: 3.8 dBi UHF: 5.2 dBi
TYPE	VHF: center loaded 1/2 wave UHF: collinear
VSWR (see bandwidth)	2:1
BANDWIDTH @ 1.5	VHF: 2% / UHF: 3%
BANDWIDTH @ 2.0	VHF: 4% / UHF: 6%
COIL	VHF: 146 MHz / UHF: 445 MHz
POWER RATING	VHF: 100 Watts / UHF: 100 Watts
WHIP	W2/70 B, .100 enclosed coil
COAX	17' RG-58A/U
MAX HEIGHT	34 3/4"

Complete factory tuned dual band antenna and mounting kit for 2m/70cm amateur radio frequencies. Black coil and whip.



MODEL	FREQUENCY (MHz)
NMO2/70SH	144 - 148 / 440 - 450

SPECIFICATIONS

GAIN	VHF: 2.14 dBi UHF: 4 dBi
TYPE	VHF: center loaded 1/4 wave UHF: center loaded 3/4 wave
VSWR (see bandwidth)	1.5:1
BANDWIDTH @ 1.5	VHF: 10% / UHF: 10%
BANDWIDTH @ 2.0	VHF: 15% / UHF: 17%
COIL	VHF: 146 MHz / UHF: 445 MHz
POWER RATING	200 Watts
COLOR	Black/Stainless
WHIP	.100 enclosed coil
COAX	Order separately
MAX HEIGHT	19"

Factory tuned NMO 2m/70cm "short" antenna with Stainless spring and whip.



MODEL	FREQUENCY (MHz)
NMO150/450C	150 - 154 / 450 - 460

SPECIFICATIONS

GAIN	VHF: 3.8 dBi UHF: 5.2 dBi
TYPE	VHF: center loaded 1/2 wave UHF: collinear
VSWR (see bandwidth)	2:1
BANDWIDTH @ 1.5	VHF: 2% / UHF: 3%
BANDWIDTH @ 2.0	VHF: 4% / UHF: 6%
COIL	VHF: 150 MHz / UHF: 450 MHz
POWER RATING	100 Watts
COLOR	Black/Stainless
WHIP	W150/450, .100 enclosed coil
COAX	Order separately
MAX HEIGHT	37 1/4"

Commercial dual band coil and factory tuned Stainless whip for 150 - 154 / 450 - 460 MHz radio frequencies.



MULTI BAND
VHF / UHF



NOTE: Antennas are not to scale

1 800 ANTENNA

To convert to Gain (dBd):
Gain (dBi) - 2.14

MULTI BAND VHF/UHF



NMO tri-band with
MakroBlend® base and
black whip.

MODEL	FREQUENCY (MHz)
NMO150/450/800	150-165 / 450-470 / 806-940

SPECIFICATIONS	
GAIN	2.14 dBi ± 1 dBi
TYPE	Tri-Band
VSWR	2.0:1
BANDWIDTH	10% / 4% / 15%
POWER RATING	100 Watts
COLOR	Black
WHIP	15.5"
COAX	Order separately
MAX HEIGHT	16.5"
MOUNTING	NMO Mount